

FOR OFFICIAL USE						

National Qualifications 2022 MODIFIED

FOR OFFICIAL LICE

Mark	
------	--

X835/75/01

Graphic Communication

MONDAY, 16 MAY 1:00 PM – 2:30 PM



Full name of ce	ntre		Town	
Forename(s)		Sur	name	Number of seat
Date of bir	th			

Total marks — 65

Attempt ALL questions.

All dimensions are in mm.

All technical sketches and drawings use third angle projection.

You may use rulers, compasses or trammels for measuring.

In all questions you may use sketches and annotations to support your answer if you wish.

Write your answers clearly in the spaces provided in this booklet. Additional space for answers is provided at the end of this booklet. If you use this space you must clearly identify the question number you are attempting.

Use blue or black ink.

Before leaving the examination room you must give this booklet to the Invigilator; if you do not, you may lose all the marks for this paper.




2

Total marks — 65 Attempt ALL questions

1. The website homepage for a fitness company is shown below.

(a)

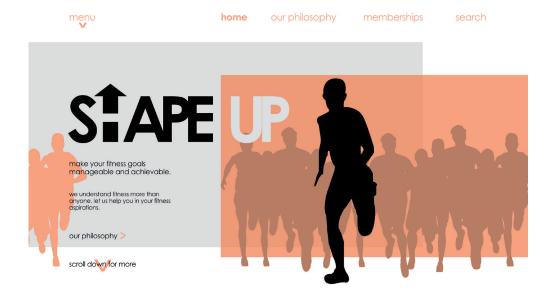

Explain two ways the designer has successfully created a moder website homepage.	n and simple


1. (continued)


(i) Alignment (ii) Depth			
(ii) Depth			
(ii) Depth			
(ii) Denth			
(ii) Deptil			
(iii) Contrast			
Explain two advantages to the fitness company of promoting their company online rather than in printed media.			




2. A 3D CAD illustration of a bicycle lock casing, and an orthographic drawing of Part A, are shown below.

DO NOT WRITE IN THIS MARGIN

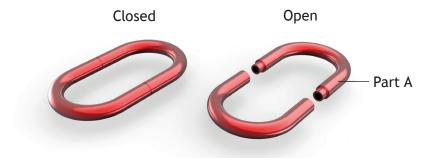

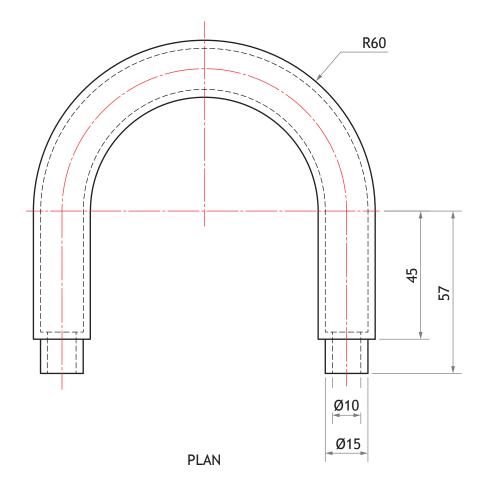

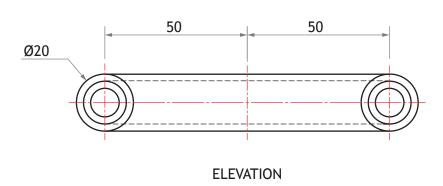


(a)	Describe, using the correct dimensions and 3D CAD modelling terms, how you would use 3D CAD software to model Part A.		
	You may use sketches to support your answer.		
	у на при		

2. (continued)

3D CAD illustrations of the bicycle lock with its packaging and a drawing of the packaging are shown.



The packaging sleeve for the bicycle lock is made from card and fits between both parts of the lock. A surface development of the packaging sleeve is shown below.

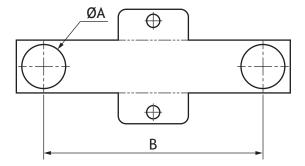

NOTE: The thickness of the card is not shown and the surface development is not to scale.



page 06


MARKS	DO NOT
MARKS	WRITE IN
	THIS
	MARGIN

_		1
, ,	CONTINUE	คา
2. ((continue	u
	(-,

(b)	Calculate the minimum dimensions on the surface development for
	(i) diameter A
	(ii) length B
(c)	Describe how the environmental impact of manufacturing the packaging sleeve can be reduced.

2

3. A designer has created preliminary sketches for a ceiling-mounted display sign for an airport. The preliminary sketches are shown below.

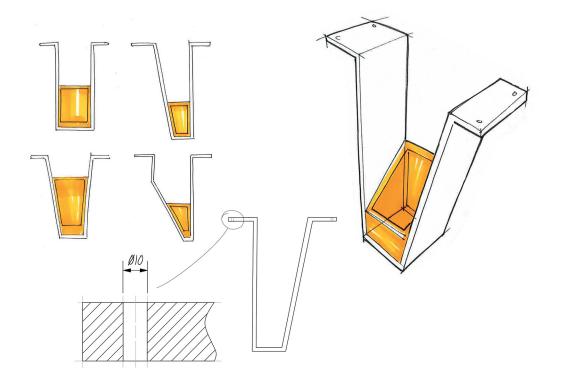


(a)	Explain the purpose of preliminary sketches.	2

(b) State two input devices that could be used to make a digital copy of the preliminary sketches.

2

(continued)

Two pictorial views of the display sign are shown below.

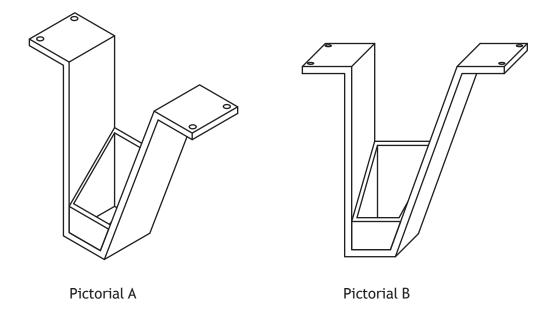


(c) State the names of the pictorial views.


Pictorial A _____

Pictorial B _____

(continued)

(d) The designer used constraints to assemble both parts of the display sign. The before and after of stage 1 of the assembly is shown below. The grey areas show the surfaces that were constrained in stage 1.

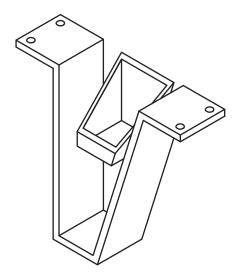

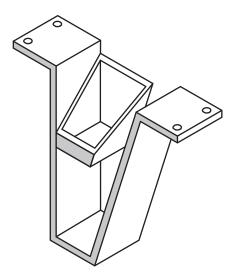

Before After

(i) State the name of the CAD constraint used above.

1

(ii) State the names of **two other** constraints used in 3D CAD modelling.

2

(e) The designer added more parts to the assembly from a CAD library. Explain one advantage to the designer of using a CAD library.

1

[Turn over for next question


DO NOT WRITE ON THIS PAGE

page 11

DO NOT WRITE IN THIS MARGIN

3. (continued)


The finished production drawing of the assembly is shown below.

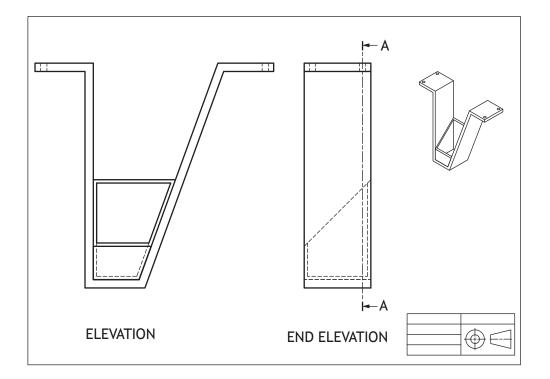


1

3. (continued)

(f) Identify the correct sectional end elevation A–A from the production drawing shown opposite, by ticking (\checkmark) a box below.

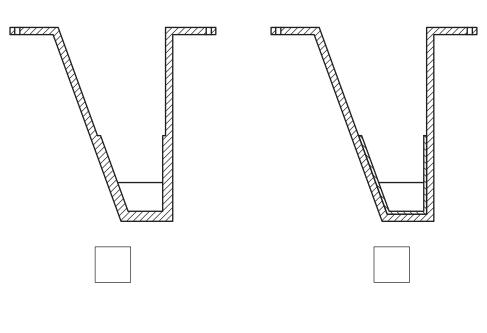

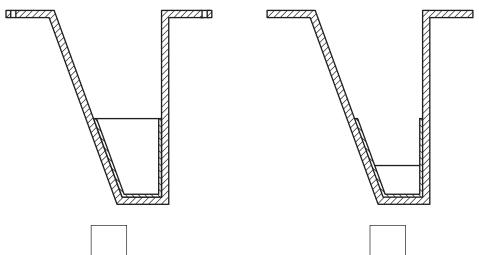

2

(continued) 3.

Two ideas for the airport signs are shown below.





Sign 1

Sign 2

(g)	Explain, giving two reasons, why sign 2 is more appropriate for the airport sign.		


[Turn over for next question

DO NOT WRITE ON THIS PAGE



page 15

4. A graphic designer has produced an instruction manual for a beehive, shown below.

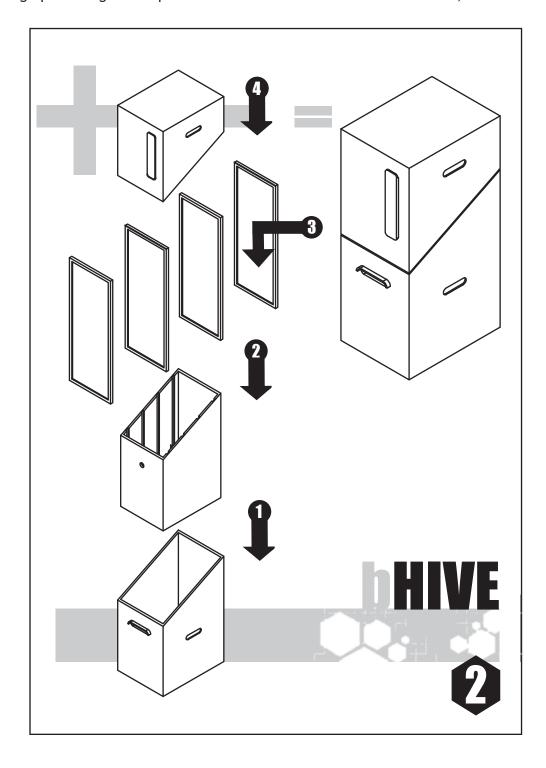

MARKS	DO NOT WRITE IN
	THIS

	_			
4. (/	-4:		ed)
4 1		nn	nii	
т. ,			ıи	CUI

(i)	User
(ii)	Manufacturer
educe er	e final printing of the instruction manual several changes were made to nvironmental impact. ribe one change that could be made to reduce the amount of ink used in
educe er	nvironmental impact.
educe er	nvironmental impact. ribe one change that could be made to reduce the amount of ink used in nstruction manual opposite.

4		1
4.	(continu	100
4.	COLLLILL	ICU /


The beehives are available in both primary and secondary colours. The lid and base are sold separately to allow customers to personalise their colour combinations.

(c)	A cus	tomer wants to purchase a red lid and a contrasting base.	
	State	the name of a suitable colour.	1
(d)	A cus	tomer wants to purchase a violet base and a harmonising lid.	
	State	the name of a suitable colour.	1
(e)		tomer plans to purchase a beehive for use in a school's garden, they have ted both parts in primary colours.	
	(i)	State the name of two primary colours that could be purchased.	2
	(ii)	Explain why primary colours are suitable for a school garden.	1


1

(continued)

A range of vinyl wraps are being created for the beehive.

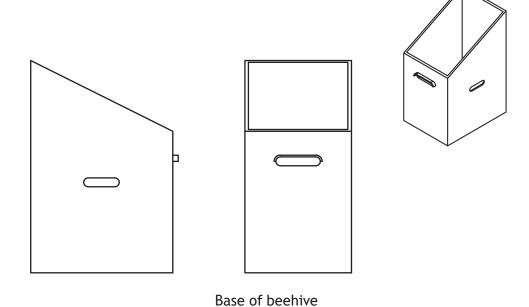

(f) (i) Identify the correct surface development used to create the vinyl wrap for the base of the beehive by ticking (\checkmark) a box below.

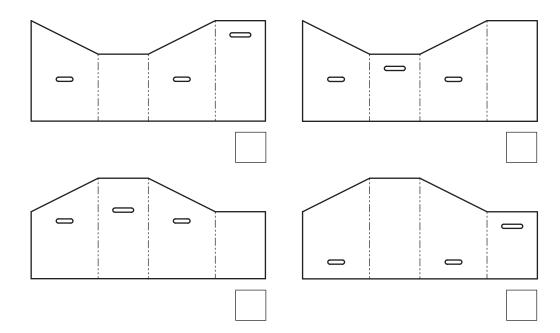




page 19

DO NOT WRITE IN THIS MARGIN

4. (f) (continued)

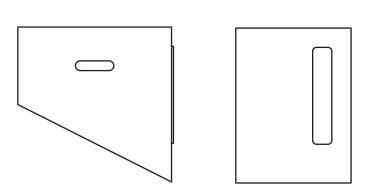

Lid of beehive




page 20

1

4. (f) (continued)

(ii) Identify the correct surface development to create the vinyl wrap for the lid of the beehive by ticking () a box below.

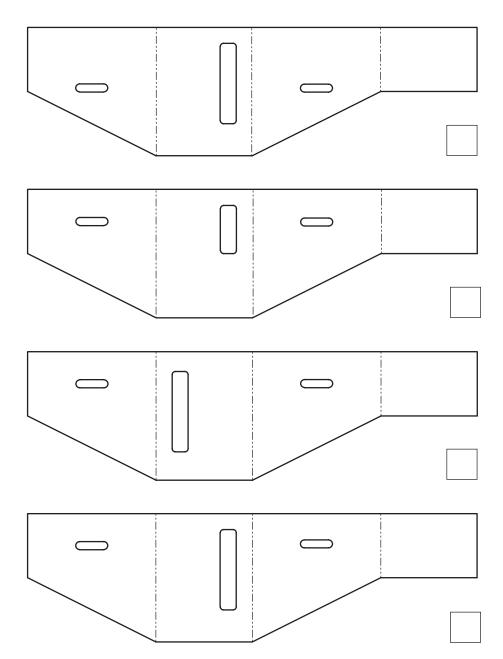



page 21

DO NOT WRITE IN THIS MARGIN


5. A new range of salt and pepper shakers are being developed.A 3D CAD illustration of the salt and pepper shakers is shown below.




A series of 2D drawing tools were used when modelling the shaker.

(a) State the name of the 2D CAD drawing tool highlighted in red that is used at each stage.


3

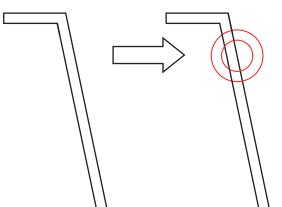

(i) tool used: _____

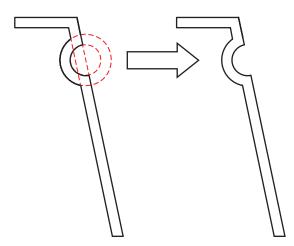

(ii) tool used: _____

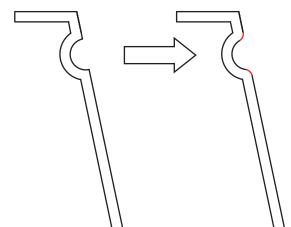

(iii) tool used: _____



(continued) 5.

The base of the shaker will be made in a range of different woods. For promotional purposes the designer produced a 3D CAD illustration.







(b) State the name of the technique used to give the greyscale model the appearance of wood.

1

(c) Describe **two** benefits of using 3D CAD models for manufacturing.

2

The initial renders were dark, pixelated and poor quality.



(d) Describe **one** way the designer could improve the final renders.

1

[Turn over for next question


DO NOT WRITE ON THIS PAGE

page 25

5. (continued)

Modifications were made to the base section of the shaker. A sealing ring was added to stop the two sections separating.

The designer's development sketches for the changes are shown below.

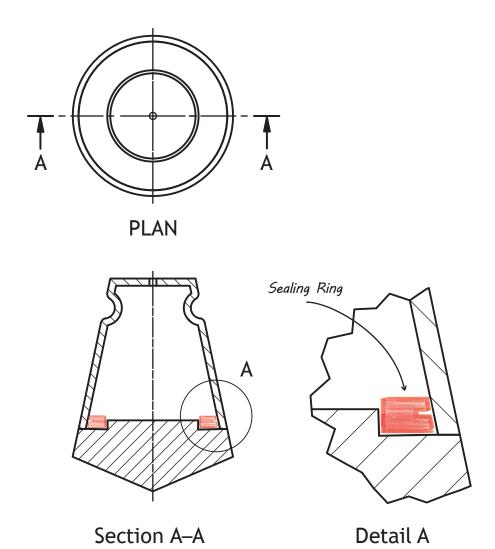



			MAKKS	WRI TI MAI
5.	(cor	ntinued)		777
	(e)	Describe, using 3D CAD modelling techniques, how the sealing ring would be modelled.		
		Do not refer to dimensions. You may annotate the line drawing on the opposite page and use sketches to support your answer.	3	

The Scottish Space Exploration Association (SSEA) are launching a proposal for a base on Mars.

Three promotional badges have been developed for the proposal.



Describe one way the designer has used the following design elements and principles in any of the badges.

(a)	(i)	Dominance
	(ii)	Line
	(iii)	Unity
(b)	(i)	State whether the font style used in the badges above is Serif or Sans Serif.
	(ii)	Explain why this font style is a suitable choice.



page 28

6. (continued)


Detail from badge 3 is shown below.




(c)	State the name of the two DTP techniques applied to the word 'expedition'.	2
	Technique 1	
	Technique 2	

6. (continued)


It is proposed that a Mars base will be constructed using identical pods arranged in different ways.

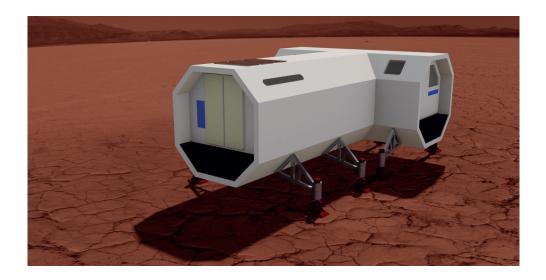

Orthographic elevations and a pictorial view of a single pod are shown below.

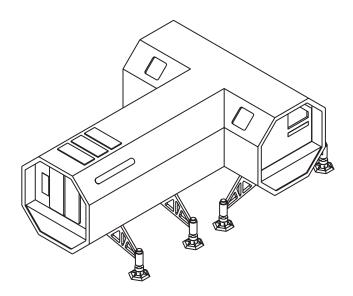

Pictorial View

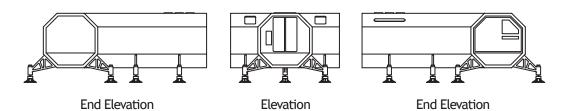



2


6. (continued)


(d) Several arrangements are shown below. The pod legs have been removed to simplify the drawings.


Identify the two correct arrangements by ticking (\checkmark) two boxes below.

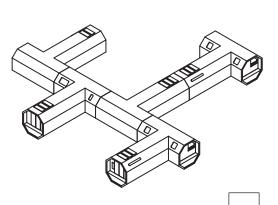

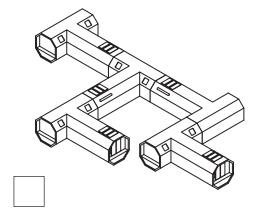

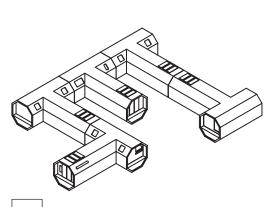

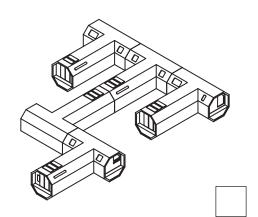






6. (continued)


(e) An exploded pictorial of a pod leg is shown below.

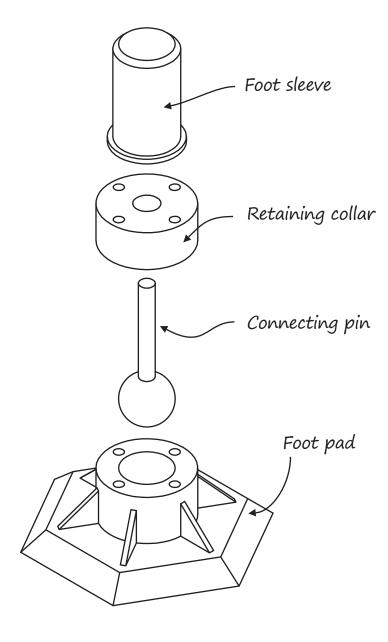


6. (e) (continued)

Identify the foot sleeve, retaining collar, connecting pin and foot pad by labelling the sectional elevation.

4

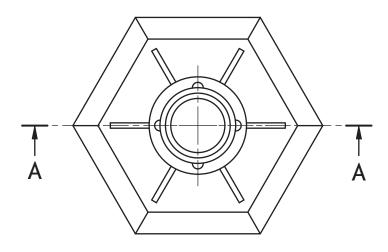



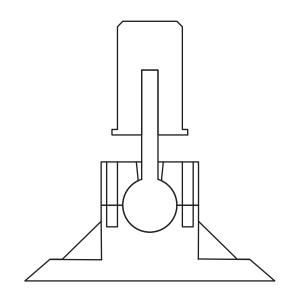

Sectional Elevation A-A

[END OF QUESTION PAPER]



page 33

ADDITIONAL SPACE FOR ANSWERS

page 34

ADDITIONAL SPACE FOR ANSWERS



page 35

[BLANK PAGE]

DO NOT WRITE ON THIS PAGE

page 36